



COMPLIANCE

- ANSI/TIA 568.2-D Category 6A
- ISO/IEC 11801 Class Ea

FEATURES & BENEFITS

- Meet and exceed Category 6A performance
- Modular shielded design
- Dust-proof shutter in the front to prevent the dust and air flow
- Snap-in design for easy installation and maintenance
- Convenient and clear marking
- Rear cable manager




PHYSICAL CHARACTERISTICS

IDC	Phosphor bronze
RJ45 Pin	Phosphor bronze with 50microinch gold plating
Plug Insertion	≥1000 times
IDC Insertion Life Span	≥250 times
AWG	22~26AWG
Wiring	T568A/T568B

ELECTRICAL CHARACTERISTICS

Dielectric Strength	DC 1000V(AC750V) 1min, no breakdown and arcing phenomena
DC Resistance	≤300mΩ
Connecting Resistance	≤20mΩ
Insulation Resistance	Under normal atmospheric pressure ≥500mΩ

NAME CODING

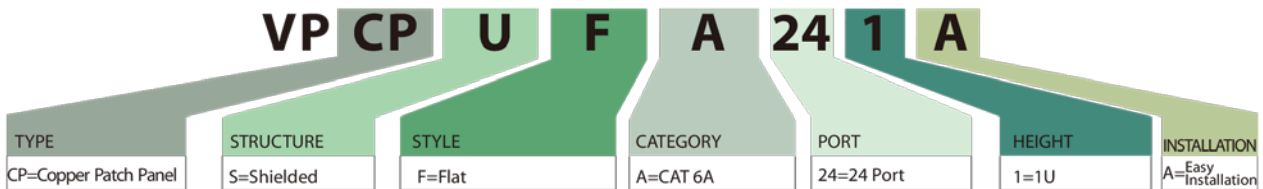

ORDERING INFORMATION

Part No.	Description
VPCPSFA241B	VIVANCO CAT 6A 24 Port Patch Panel, Shielded, Loaded (with Dust-proof Shutter)



DIAGRAM



1. Grounding bar for automatic grounding



2. Special metal surface treatment, and directly grounded with the cabinet rails



3. Grounding wire



4. Reliable and removable rear cable manager



5. Horizontal cable holder for cable management



6. Clear marking label



7. Clear and indelible port numbers



8. Automatically-rebound dust-proof shutter